

Positioners, heavy-duty


LH-Positioner 3-Axis from 500 kg to 3t

Light version



Features

- LH-3Axis model 3 axis Head Tail Stock Positioner, regardless of any geometric shape within dimensions of the machine, in favour of being able to position and generating remarkable welding edges to all workpieces are qualified & ideal solutions. Ensures utmost capability of welding & likewise assembling at 360° degree of any required position .
- Designed in best suitable configuration to perform safe positioning of the workpieces having asymmetry & higher probability of overturn.
- Avoids of crane operations that are part handling, rotating of parts, etc. during production, provides the opportunity of usin operator's working power to use more effectively by minimizing time loss and it increases the efficiency of work.
- LH-3Axis model positioner with robust construction & easy controlling ability, provides the opportunity of comfortable working to operator & improves the quality of welding.
- The operators with LH-3AX „L“ type positioner, at center axis of worktable Work-piece can be precisely rotated over the command control at Clockwise (CW) dr Counterclockwise(CCW) at specified speeds.

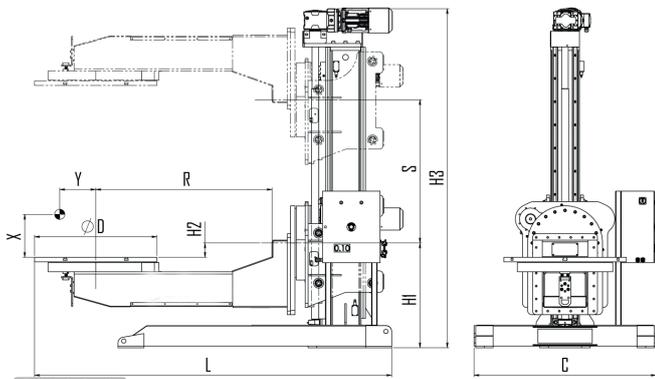

PRICE ONLY ON REQUEST!



QR code for more Information

Model	Sym	LH-05 3AX	LH-75 3AX	LH1,5 3AX	LH3 3AX
Capacity		500 kg	750 kg	1500 kg	3000 kg
Lifting Stroke	S	550 mm	650 mm	1000 mm	1150 mm
Working Radius	R	1000 mm	1000 mm	1200 mm	1600 mm
Offset Distance	X-Y	450-150 mm	300-150 mm	450-150 mm	450-150 mm
Table Diameter	ØD	700 mm	1000 mm	1150 mm	1250 mm
Table Torque		750 Nm	4550 Nm	7500 Nm	12050 Nm
Table Speed		0,15-1,5 rpm	0,2-1,5 rpm	0,2-1,4 rpm	0,2 - 1 rpm
Tilt Torque		2100 Nm	2750 Nm	3340 Nm	6900 Nm
Tilt Speed		1,2 rpm	0,70 rpm	0,70 rpm	0,55 rpm
Lifting Speed		0,6 m/min	0,6 m/min	0,50 m/min	0,50 m/min
Max.Welding Current	A	700 Amp	700 Amp	700 Amp	700 Amp
Rotating Center Height	H1	770 mm	680 mm	730 mm	720 mm
Plate Rotating Center Difference	H2	50 mm	144 mm	100 mm	100 mm
Total Height	H3	1900 mm	1910 mm	2380 mm	2630 mm
Total Length	L	2170 mm	2200 mm	2480 mm	3160 mm
Total Width	C	1170 mm	1300 mm	1265 mm	1500 mm
Motor Power of Table		0,37 kW	0,37 kW	0,55 kW	0,75 kW
Motor Power of Tilting		0,37 kW	0,37 kW	0,55 kW	0,75 kW
Motor Power of Lifting		0,75 kW	1,1 kW	1,5 kW	3 kW
Weight		730 kg	1050 kg	1390 kg	2230 kg