


Positioners, heavy-duty

3-Axis Welding Positioner

Head-Tail Stock hydraulic lift Popsitioner SP-H 3Axis

Double-stationary lift and turn positioner is particularly suitable for handling large and heavy workpieces.




PRICE
ONLY
ON
REQUEST!

Up and Down Movements by Hydraulic

Features

- SP-H-3AX model 3 axis Head Tail Stock Positioner, Regardless of any geometric shape within dimensions of the machine, in favour of being able to position and generating remarkable welding edges to all workpieces are qualified & ideal solutions. Ensures utmost capability of welding & likewise assembling at 360° degree of any required position.

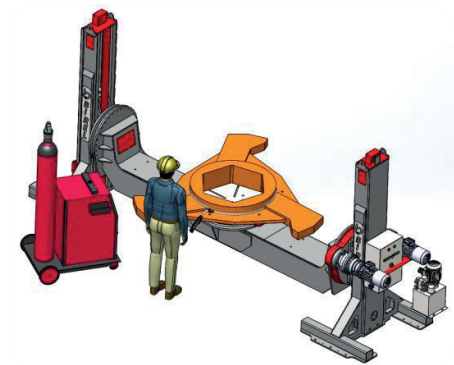

Note




Optional control units from page 132



Positioners, heavy-duty

3-Axis Welding Positioner

Head-Tail Stock hydraulic lift Popsitioner SP-H 3Axis

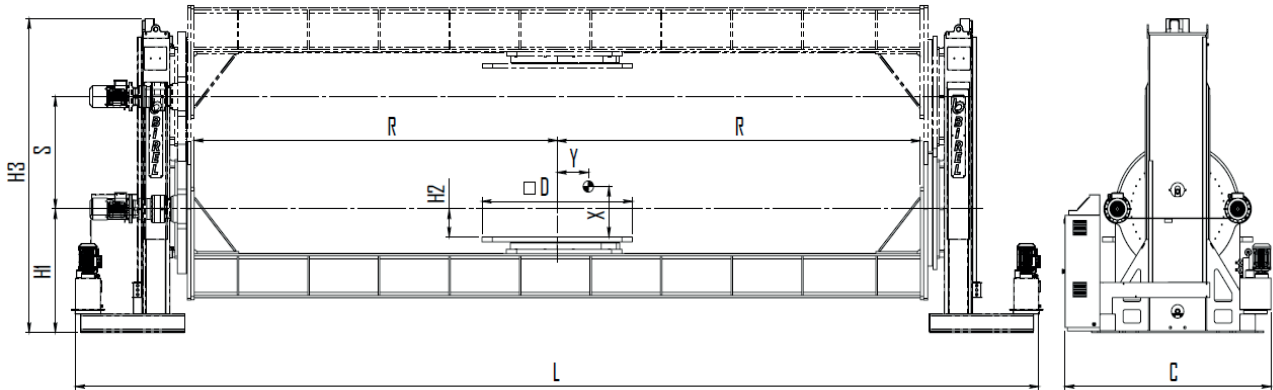

Model	Sym	SP7,5 H- 3 Axis	SP10H-3 Axis
Loading Capacity		7500 kg	1000 kg
Rotation Speed		0,1 - 0,66 rpm	0,1 - 0,50 rpm
Tilting Speed		80 sec	90 sec
Up & Down time (mm/min.)		12050 Nm	15050 Nm
Rotational Torque		25100 Nm	15050 Nm
Tilt Torque		25100 Nm	33400 Nm
Offset	X-Y	500 - 150 mm	500 - 150 mm
Table Plate Diameter	D	1250 mm	1450 mm
Radius	R	3400x2	3400x2
Tilt Center Height	H1	1100 mm	1100 mm
Table-Rotating Center Difference	H2	250 mm	250 mm
Lifting Stroke	S	1000 mm	1000 mm
Height	H3	2750 mm	2800 mm
Total Length	L	9250 mm	9290 mm
Total Width	C	1850 mm	2000 mm
Motor Power of Table		1,5 x 1	1,5 x 1
Motor Power of Tilting		1,5 x 2	2,2 x 2
Motor Power of Lifting (Hydraulic Lift)		1,5 x 2	2,2 x 2



QR code
for more
Information