

ECO-S Line Positioners

Welding Positioner ECO-S200

Features

- Tilting range up to 90° manually infinitely adjustable via crank handle
- Foot switch Start/Stop.
- Switch for cw/ccw turning.
- The turntable speed is adjustable from 0,5 to 5 U/min.
- 350A ground connection



up to
200 kg

Model	ECO S200
Supply voltage	1PH/230 V – 50/60 Hz DC PCB
Rotation motor	200 W
hollow shaft ø	45 mm
Tilting range	0° - 90°
Worktable diameter	400 mm
Rotation speed	0,5 - 5 rpm
Torque	100 Nm
Mounting hole circle Ø	110 - 313 mm
Max. horizontal load	200 kg
Max. vertical load	100 kg
Tilting methode	manual
horizontal height	505 mm
Center height of tilt	390 mm
Weight	55 kg
Item no.	02.30.01.00055

Scope of delivery:

1 control system (integ.)
1 Foot switch

ECO-S Line Positioners

Welding Positioner ECO-S200


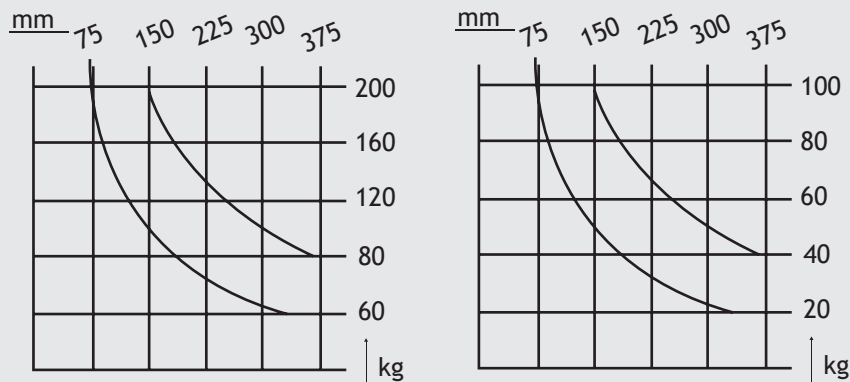




Diagram: ECO S200

When choosing your positioner, please consider:

- the center of gravity of your workpiece
- the weight of your tensioning device(chuck)

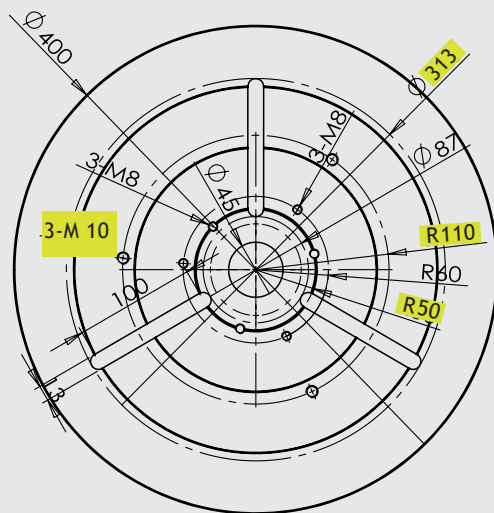

Turntable plate ECO S100 and ECO S200

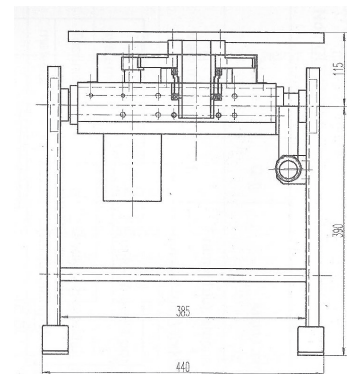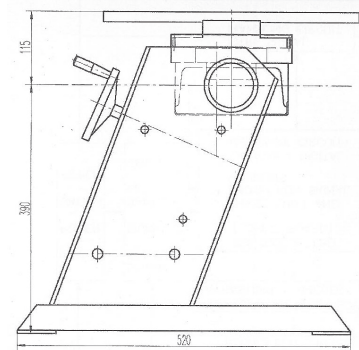

Note

Suitable quick action chuck for ECO-S200
Chuck 200JW, Chuck 300JW and Chuck 400 JW

Page: 128

Chuck 300 JW
Item no.: 02.20.10.01030

