

ECO-S Line Positioners

Welding Positioner Eco-S300

Features

- Tilting range up to 90° manually infinitely adjustable via crank handle
- Foot switch Start/Stop.
- Switch for cw/ccw turning.
- Rotationtime adjustable.
- The turntable speed is adjustable from 0,2 to 2,5 U/min.
- Controlling of the welding machine by integ. control system
- 350A ground connection

up to
300 kg

with
90 mm
hollow shaft



Model	ECO S300
Supply voltage	1PH/230 V – 50/60 Hz DC PCB
Rotation motor	200 W
hollow shaft ø	90 mm
Tilting range	0° - 90°
Worktable diameter	500 mm
Rotation speed	0,2 - 2,5 rpm
Torque	200 Nm
Mounting hole circle Ø	110 - 413 mm
Max. horizontal load	300 kg
Max. vertical load	100 kg
Tilting methode	manual
horizontal height	650 mm
Center height of tilt	445 mm
Weight	90 kg
Item no.	02.30.01.00065

Scope of delivery:
1 control system (integ.)
1 Foot switch

ECO-S Line Positioners

Welding Positioner ECO-S300


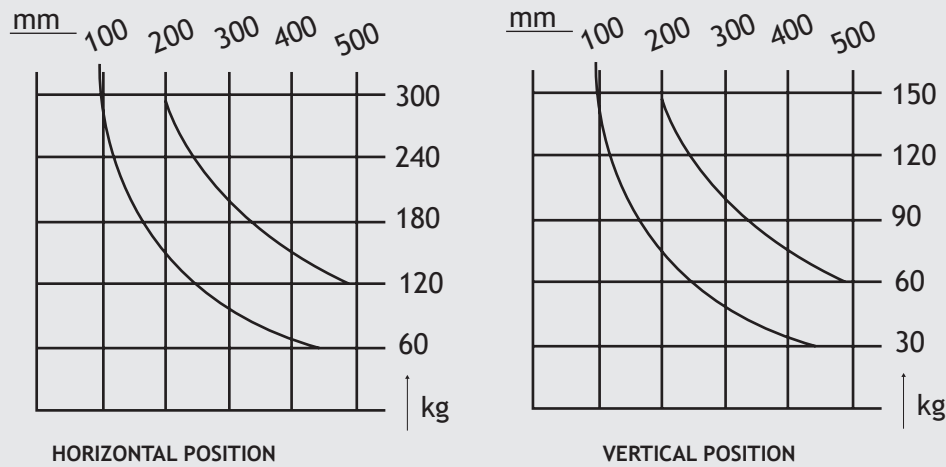


Diagram: ECO S300

When choosing your positioner, please consider:

- the center of gravity of your workpiece
- the weight of your tensioning device(chuck)

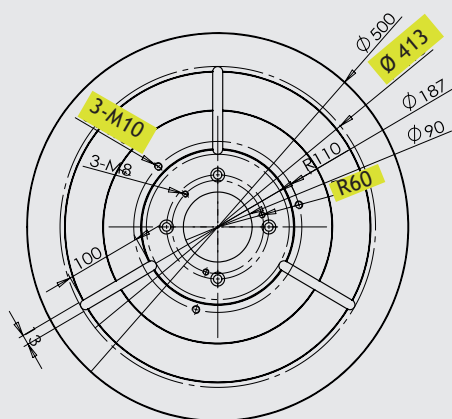

Turntable plate ECO S300

Note

Suitable quick action chuck for ECO-S300
Chuck 200JW, Chuck 300JW and Chuck 400 JW

Page: 128

Chuck 400 JW
Item no.: 02.20.10.01040
(old:919191116)

