


# Turnrollers

## Support Block TR-2000

### Useful and versatile

With Turnrollers of the TR series, it is very easy to position containers and pipes with a diameter of 80 mm to 2200 mm and to weld circumferential seams. Due to the low initial costs, the purchase pays for itself in a very short time. With the help of a torch stand, the welding process can be further simplified and the welder can concentrate exclusively on controlling the welding process.

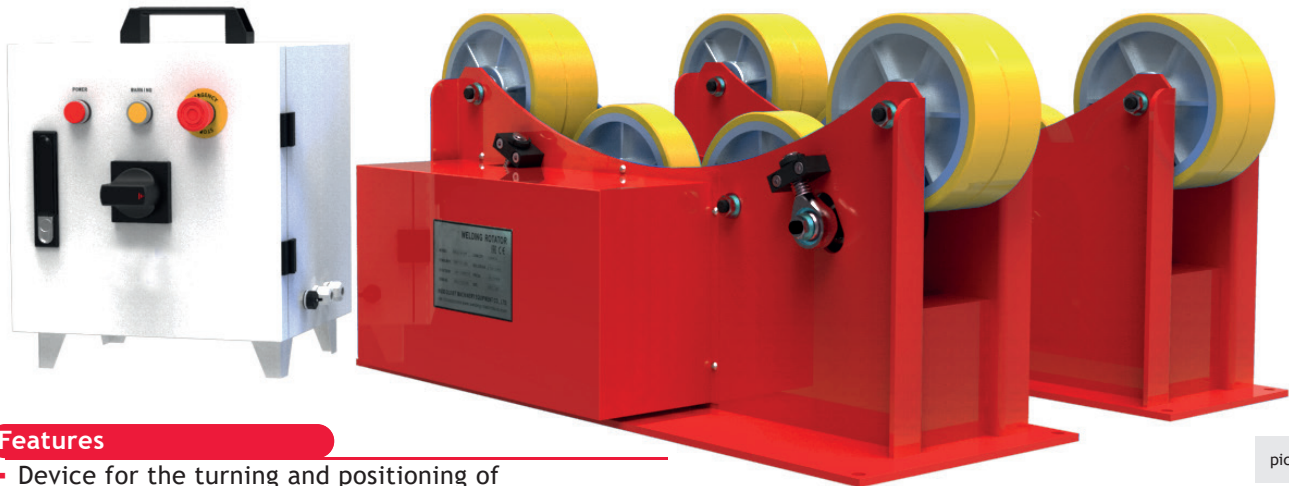

pic. TR-2000

### Features

- Device for the turning and positioning of small tanks and cylindrical workpieces.
- Equipped with high performance PU coated metal roller to provide stable running
- DC infinitely variable speed control
- AC variable speed control system
- Switch for cw/ccw rotation, foot switch for start/stop functions.
- High frequency protection

### Scope of delivery TR-2000:

- 1 Drive unit with control system
- 1 Idler
- 1 Remote control

| Model                  | TR-2000 complete                                  |
|------------------------|---|
| Max Load               | 2000kg  |
| Pipe Diameter Range    | Ø 100 - 2200 mm                                   |
| Rotation Speed         | 150 - 1500 mm/min                                 |
| Rotation Power         | AC 0.37   |
| Roller Size            | Ø250x50 mm (12 Roller)                            |
| Roller Material        | Steel coated with PU                              |
| Measurement (LxWxH) mm | 850x330x440 mm (Driver)<br>850x230x440 mm (Idler) |
| Weight (complete)      | 175 kg  |
| Item no.               | 02.30.10.20200                                    |

| Modell              | TR-2000 Idler  |
|---------------------|----------------|
| Load                | 1000 kg        |
| Workpiece Diameter  | Ø 80-700mm     |
| Weight              | 80 kg          |
| Measurement (LxWxH) | 850x230x440 mm |
| Item no.            |                |

