

Turnrollers

Roller block series HGK up to 1000 t






Stable turning

The HGK series has two synchronous drive units that provide continuous rotation with infinitely variable speed control. The distance between the rollers can be increased and decreased manually by means of bolts in order to achieve a large diameter range of the workpieces.

Features

- For turning and positioning workpieces in the sections of mechanical engineering, container building, plant construction and pipeline construction.
- With two synchronous driven motors.
- Adjustable rotating speed.
- PU-Rolls.
- The adjustment is via bolts
- Remote control

Scope of delivery:
1 Remote control

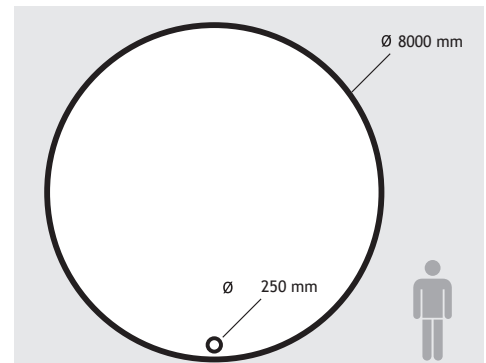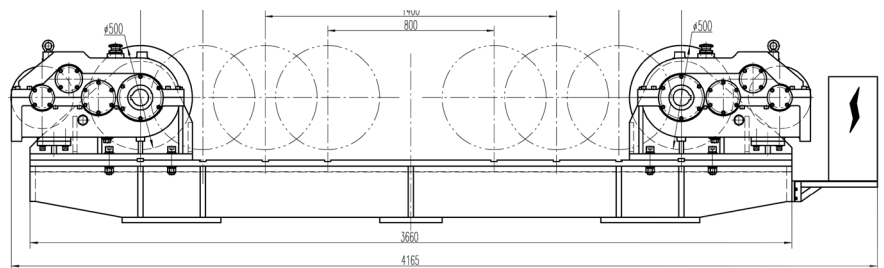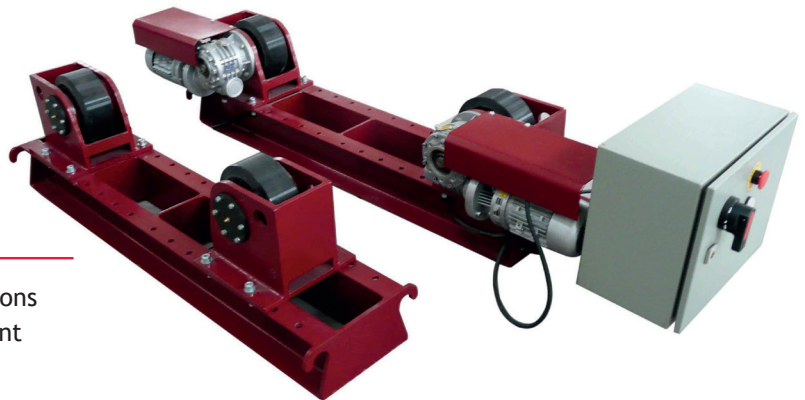

The HGK-Series:
For Workpiece diameter
from 250 mm up to 8.000 mm

HGK-150

Model	Speed	Max. Load	Workpiece diameter	Motor (Kw) Power	rubber diameter	rubber rollers width	Item. no.
HGK-2	6 - 60 m/h	2.000 kg	150 - 2.000 mm	2x0,18	200 mm	80 mm	02.20.10.10120
HGK-5		5.000 kg	250 - 2.800 mm	2x0,37	250 mm	120 mm	02.20.10.10150
HGK-10		10.000 kg	300 - 3.200 mm	2x0,55	300 mm	130 mm	02.20.10.11100
HGK-20		20.000 kg	500 - 4.500 mm	2x1,1	350 mm	180 mm	02.20.10.11200
HGK-40		40.000 kg	500 - 5.000 mm	2x1,5	400 mm	220 mm	02.20.10.11400
HGK-60		60.000 kg	800 - 6.000 mm	2x2,2	450 mm	2x 180 mm	02.20.10.11600
HGK-80		80.000 kg	800 - 6.000 mm	2x3	450 mm	2x 180 mm	02.20.10.11800
HGK-100		100.000 kg	800 - 6.000 mm	2x3	500 mm	2x 200 mm	02.20.10.12000
HGK-160		160.000 kg	800 - 6.000 mm	2x4	550 mm	200 mm	
HGK-200		200.000 kg	800 - 6.500 mm	2x4	650 mm	250 mm	
HGK-250		250.000 kg	800 - 6.500 mm	2x5,5	650 mm	250 mm	
HGK-300		300.000 kg	800 - 6.500 mm	2x5,5	700 mm	300 mm	
HGK-500		500.000 kg	1.000 - 8.000 mm	2x7,5	750 mm	350 mm	
HGK-800		800.000 kg	1.000 - 8.000 mm	2x15	850 mm	400 mm	
HGK-1000		1.000 000 kg	1.000 - 8.000 mm	2x18,5	900 mm	500 mm	